

BHARAT REAR SKIRT SEAL

BMD BHARAT REAR SKIRT SEALING SYSTEM


BMD BHARAT REAR SKIRT SEALING SYSTEM, which prevents spillage from the rear end of the loading zone of transfer point, to provide effective sealing. The rubber seal of 10 mm thick is shaped in the form of the troughing angle to match the conveyor profile. The seal is clamped to the chute wall using mounting clamps to provide effective dust sealing of the material flow.

P/N BH-RSS (Order quantity needed)

- Available in unit quantity as per skirt board width / belt width.
- Natural / HR rubber offers good chemical resistance and low abrasion on 0°, 20°, 35° and 45° troughing angles.

Nomenclature:

BMD BHARAT REAR SKIRT SEAL

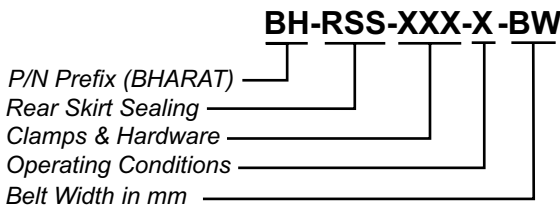

CLAMPS & HARDWARE

ASM: Clamps & Hardware
SPR: Only Rubber

OPERATING CONDITIONS

A: Ambient Temp upto 70°C

H: HR Rubber sustain upto 140°C intermediate temp

F: Fire Retardant Rubber sustain upto 180°C intermediate temp



Optic Image after installation of
BMD BHARAT REAR SKIRT SEAL SYSTEM

Belt Width (mm)	Coverage (mm)
650	450
800	550
1000	650
1200	800
1400	950
1600	1050
1800	1200
2000	1350
2200	1450
2400	1600

ITEM NO.	ITEM DESCRIPTION	CATEGORY
BH-RSS-ASM-A-BW BH-RSS-ASM-H-BW BH-RSS-ASM-F-BW	BHARAT REAR SKIRT SEAL ASM- AMBIENT BHARAT REAR SKIRT SEAL ASM- 140°C BHARAT REAR SKIRT SEAL ASM- 180°C	ASSEMBLY (Order quantity in Numbers)
BH-RSS-SPR-A-BW BH-RSS-SPR-H-BW BH-RSS-SPR-F-BW	BHARAT REAR SKIRT SEAL SPR- AMBIENT BHARAT REAR SKIRT SEAL SPR- 140°C BHARAT REAR SKIRT SEAL SPR- 180°C	SPARES (Order quantity in Numbers)

BMD ENGINEERING SOLUTIONS

Works At:- Plot No. C 39/2, Mhalunge, Chakan MIDC, Phase-1, Pune (MH) - 410501, Mob.- 77353 89730 / 83800 90023.

E-mail:- sales@bmdindia.com , bmdengineeringsales@gmail.com , Web: www.bmdindia.com

