
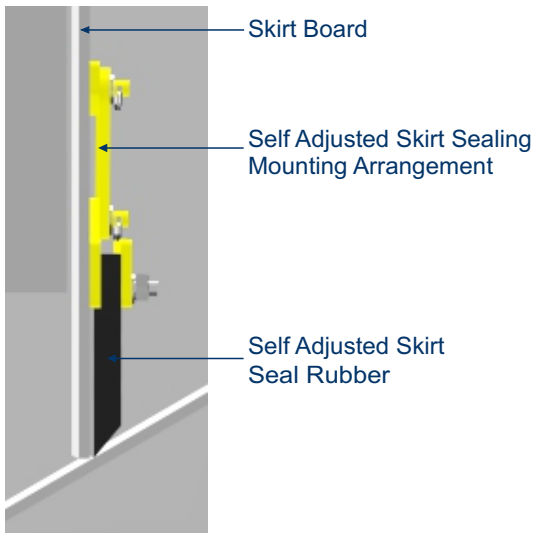


# BHARAT SELF ADJUSTED SKIRT SEAL



**BHARAT SELF ADJUSTING SKIRT SEALING** provides an effective skirt board seal that eliminates spillage and prevents the problem caused by fugitive material. It self adjusts to eliminate skirt board maintenance. As it requires only 35 mm of free belt space outside the chute, **BHARAT SELF ADJUSTING SKIRT SEALING** is the ideal sealing system for conveyors with chutes close to belt edge.

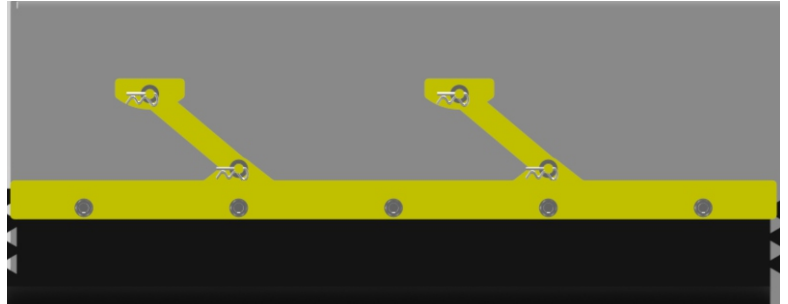

## BMD BHARAT SELF ADJUSTED SKIRT SEALING SYSTEM

P/n BH-SASL (Order quantity needed)

- Offers a self adjusted sealing system in a 1 mtr matching segments.
- Provides effective sealing on higher speed belts.
- Easy installation due to 1 mtr segments.
- Natural / HR / Nitrile rubber offers good chemical resistance and low adration index characteristics.
- Applicable on 0°, 20°, 35° and 45° troughing angles.

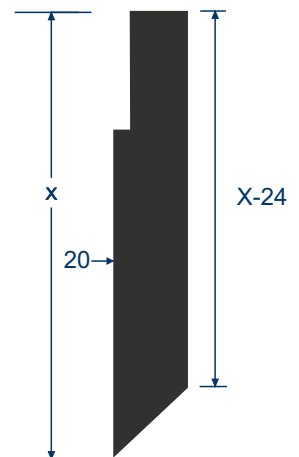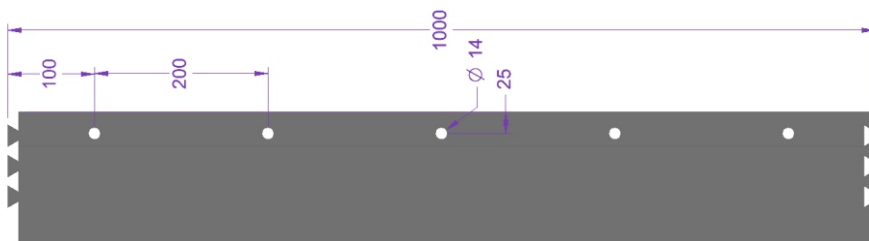

All dimensions in mm

### BMD ENGINEERING SOLUTIONS


## BHARAT SELF ADJUSTED SKIRT SEAL

Mounting clamps are used to clamp the **BMD BHARAT SELF ADJUSTED SKIRT SEAL** to chute wall, approximately 300 mm of head space is required for proper mounting. Mounting clamps are 1000 mm long with back plate, support plate and link with gun metal bush fix with rubber via R clip for easy self adjusting movement. For mounting of self adjusting skirt sealing need to weld mounting bracket on skirt board.

Consult **BMD ENGINEERING SOLUTIONS** for mounting details.

### Nomenclature:

### BMD BHARAT SELF ADJUSTED SKIRT SEAL

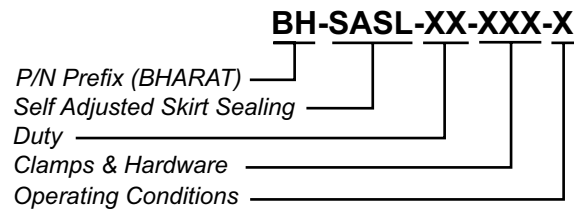

### Duty

**SD:** Rubber height  
150 mm

**HD:** Rubber Height  
200 mm

### CLAMPS & HARDWARE

**ASM:** Clamps  
& Hardware


**SPR:** Only Rubber

### OPERATING CONDITIONS


**A:** Ambient Temp upto 70°C

**H:** HR Rubber sustain upto 140°C intermediate temp

**F:** Fire Retardant Rubber sustain upto 180°C intermediate temp

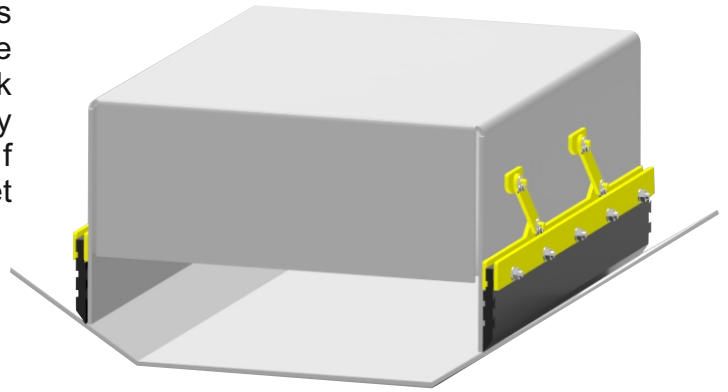

Optic Image after installation of  
**BMD BHARAT SELF ADJUSTED  
SKIRT SEAL SYSTEM**

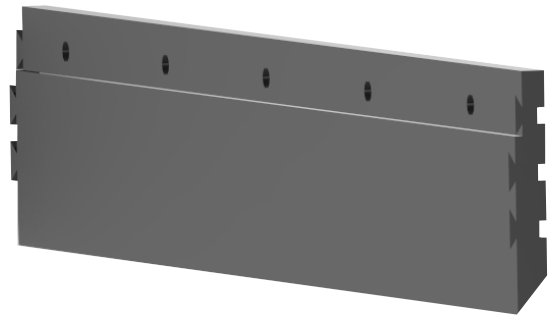

ITEM NO.	ITEM DESCRIPTION	CATEGORY
BH-SASL-SD-ASM-A BH-SASL-SD-ASM-H BH-SASL-SD-ASM-F BH-SASL-HD-ASM-A BH-SASL-HD-ASM-H BH-SASL-HD-ASM-F	BHARAT SELF ADJUSTED SKIRT SEAL SD- AMBIENT BHARAT SELF ADJUSTED SKIRT SEAL SD- 140°C BHARAT SELF ADJUSTED SKIRT SEAL SD- 180°C BHARAT SELF ADJUSTED SKIRT SEAL HD- AMBIENT BHARAT SELF ADJUSTED SKIRT SEAL HD- 140°C BHARAT SEAL ADJUSTED SKIRT SEAL HD- 180°C	ASSEMBLY (Order quantity in Mtr's)
BH-SASL-SD-SPR-A BH-SASL-SD-SPR-H BH-SASL-SD-SPR-F BH-SASL-HD-SPR-A BH-SASL-HD-SPR-H BH-SASL-HD-SPR-F	BHARAT SELF ADJUSTED SKIRT SEAL SPR SD- AMBIENT BHARAT SELF ADJUSTED SKIRT SEAL SPR SD- 140°C BHARAT SELF ADJUSTED SKIRT SEAL SPR SD- 180°C BHARAT SELF ADJUSTED SKIRT SEAL SPR HD- AMBIENT BHARAT SELF ADJUSTED SKIRT SEAL SPR HD- 140°C BHARAT SEAL ADJUSTED SKIRT SEAL SPR HD- 180°C	SPARES (Order quantity in Mtr's)

## BMD ENGINEERING SOLUTIONS

Works At:- Plot No. C 39/2, Mhalunge, Chakan MIDC, Phase-1, Pune (MH) - 410501, Mob.- 77353 89730 / 83800 90023.

E-mail:- sales@bmdindia.com , bmdengineeringsales@gmail.com , Web: www.bmdindia.com

